


KWIKSWITCH™ KITS

FLOAT SWITCH CONNECTION SYSTEM

KWIKSWITCH™ KITS INCLUDE:


1. (1) KwikSwitch 4-port manifold
 - ABS plastic
 - Single multiconductor 18-8 shielded direct burial cable, PVC TPE TC-ER TFFN (UL) 600V
 - Colored identification caps Red-Blue-Yellow-White match cable conductor wire pairs
2. (1) KwikSwitch stainless steel manifold mounting bracket
3. (4) KwikSwitch quick release control float switches
 - Mechanically-activated, narrow-angle, internally weighted
 - Normally Open, gold cross point contacts, rated at min. 1mA@4 VDC, max. 1A@125 VAC
 - 25 ft. flexible SJOW water resistant cable
4. (1) 6-position stainless steel hook bracket (optional)
5. (1) Sealing plug must be ordered for each unused port (PN 1054136) sold separately

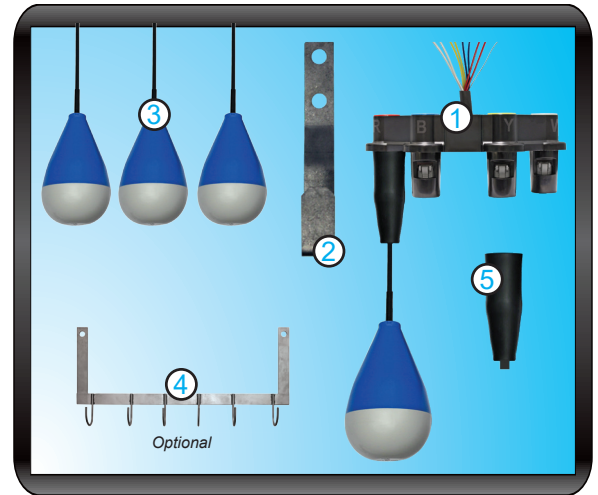

Note: Do not install manifold with open ports.

ORDERING

PARTNUMBER	DESCRIPTION
1053978	25ft. KwikSwitch™ Manifold kit with hook bracket
1055394	50ft. KwikSwitch™ Manifold kit with hook bracket
1055393	100ft. KwikSwitch™ Manifold kit with hook bracket
1055247	25ft. KwikSwitch™ Manifold kit w/out hook bracket
1055395	50ft. KwikSwitch™ Manifold kit w/out hook bracket
1055396	100ft. KwikSwitch™ Manifold kit w/out hook bracket

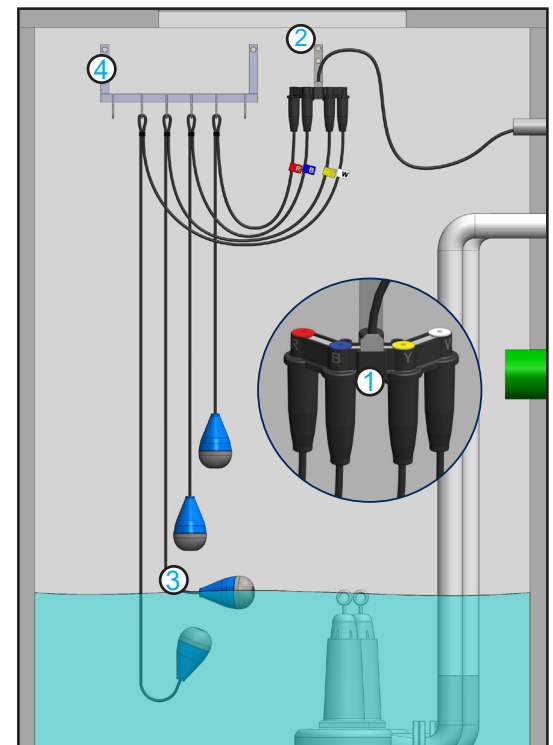

844-4PRIMEX (477-4639)
WWW.PRIMEXCONTROLS.COM