


6 HOOK BRACKET

UNIVERSAL HANGER

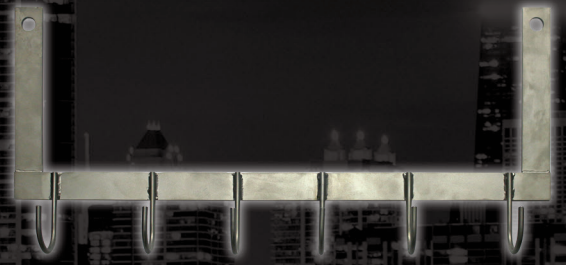

OVERVIEW

The PRIMEX® hook bracket is designed as a universal hanger for up to 6 float switches, submersible transmitters, and small horsepower pump cords.

FEATURES

- (6) round hooks to reduce cord abrasion from sharp edges
- Hooks full weld joints
- Bracket full weld joints
- Metal thickness of the bracket provides strength with flexibility to shape to round tank risers
- Fits tank access frames

APPLICATIONS


- Sewage and effluent lift stations
- Stormwater pump stations
- Tanks, wet wells and reservoirs

ORDERING


PART NUMBER	DESCRIPTION
1051522	Stainless Steel 6 Hook Bracket

SPECIFICATIONS

- Material: 304 Stainless Steel
- Construction: TIG weld, hooks and bracket full length weld
- Bracket flat bar stock: 1.0" x 0.125" (25.4 mm x 3.2 mm)
- Bracket dimensions:

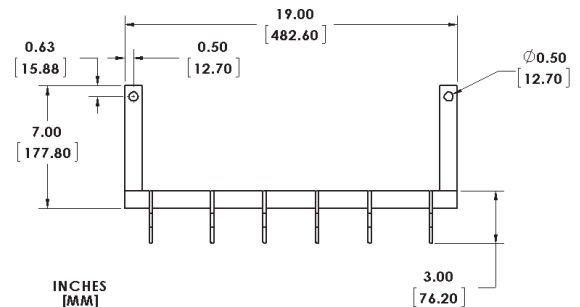

- Hook diameter: 0.188" x 3.0" (1.8 mm x 76.2 mm)
- Hook dimensions:



- Weight: 1.35 lbs (0.61 kg)



844-4PRIMEX (477-4639)
WWW.PRIMEXCONTROLS.COM